

FHA 051




FHA **S**ERIES **051**

Working pressure


560 bar




Style S




Style B




Style T




Style D



Style V



Style Z



Technical data

Filter body (Materials)

- Head: Steel (chemical heat treatment)
- Housing: Steel (chemical heat treatment)
- Bypass valve: Steel

Pressure

- Maximum operating pressure: 560 bar (56 MPa)
- Test pressure: 630 bar (63 MPa)
- Burst pressure: 1250 bar (125 MPa)
- Pulsed pressure fatigue test 1,000,000 of cycles from 0 to 560 bar (56 MPa)

Temperature

- From -25 °C to +110 °C

Bypass valve

- Opening pressure 6 bar \pm 10%
- Other opening pressures on request.

Elements type Δp

- Elements in microfibre series N-R: 20 bar
- Elements in microfibre series H-S: 210 bar
- Elements in stainless steel mesh series N: 20 bar
- Oil flow from exterior to interior.

Seals

- Standard Nitrile (NBR) series A
- Optional FPM series V

Weights without filter elements (kg.)

Length

- FHA051 -1 3.0
- FHA051 -2 3.6
- FHA051 -3 3.9
- FHA051 -4 4.5
- FHA051 -5 6.1

Filter internal volumes (dm³)

Length

- FHA051 -1 0.38
- FHA051 -2 0.47
- FHA051 -3 0.57
- FHA051 -4 0.68
- FHA051 -5 0.88

Connections

In-line Inlet/Outlet

Compatibility

- Bodies compatible with: Mineral oils to ISO 2943 - aqueous emulsions synthetic fluids, water/glycol.
- Filter elements compatible with: Mineral oils to ISO 2943 - aqueous emulsions synthetic fluids, water/glycol.

- Nitrile (NBR) seals series A, compatible with: Mineral oils to ISO 2943 - aqueous emulsions synthetic fluids, water/glycol.
- V series FPM seals, compatible with: Synthetic fluids type HS-HFDR-HFDS-HFDU To ISO 2943

Filter Element Area




Filter element in stainless steel mesh

Type	Length				
	1	2	3	4	5
HP050	450	700	1000	1300	2100
Values expressed in cm ²					


Pressure drops Δp Housing

The curves are plotted using mineral oil with density of 0.86 kg/dm³ to ISO 3968.


Δp Varies proportional with density.

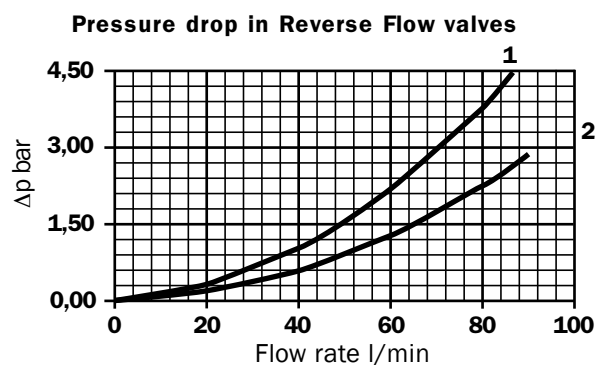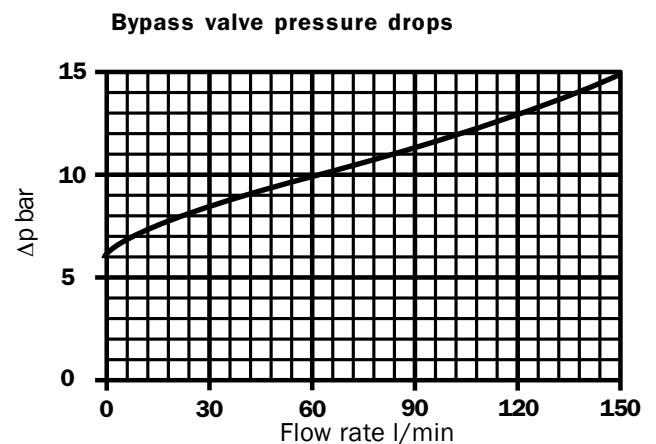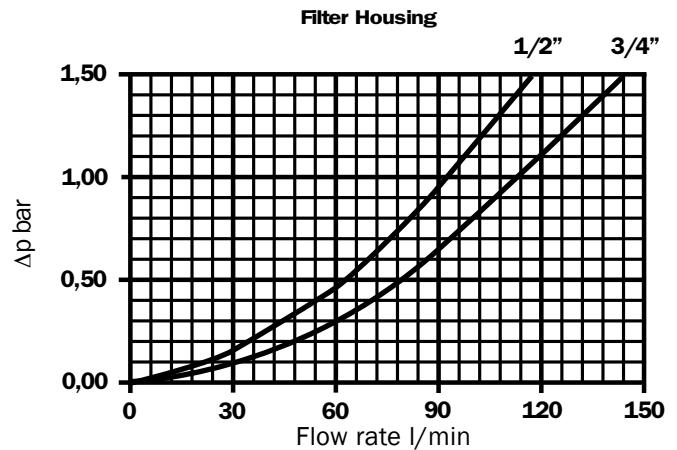


1 - Reverse Flow
2 - In filter direction

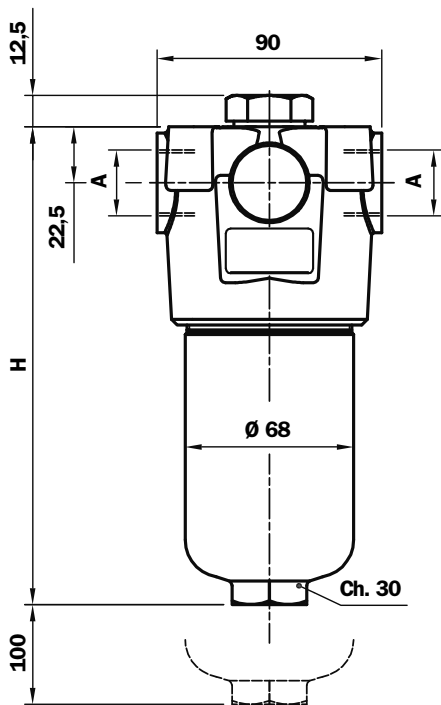

With standard indicator

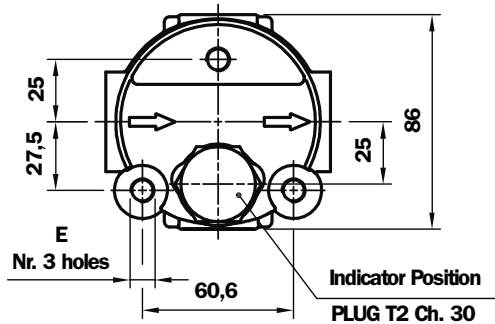

Option P03 with 90° indicator

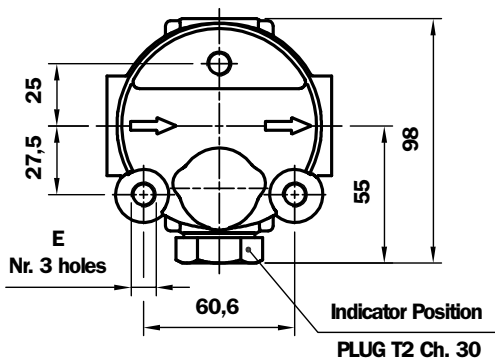

NB. Versions with differential indicator are supplied with plug T2.

Recommended maximum flow rate

- Pressure drop of complete filter equal to Δp 1.5 bar.
- Oil kinematic viscosity 30 mm²/s (cSt).
- Density 0.86 kg/dm³.
- Connections of filter under test G 3/4".


Filter element type	Flow rate l/min Series N	Flow rate l/min Series H	Filter Length
A03	42	30	1
A06	44	39	
A10	77	57	
A16	78	58	
A25	98	72	
M25	132	-	
A03	52	45	2
A06	55	49	
A10	82	74	
A16	91	84	
A25	112	105	
M25	135	-	
A03	66	58	3
A06	68	61	
A10	92	85	
A16	100	93	
A25	118	112	
M25	135	-	
A03	80	75	4
A06	85	78	
A10	105	98	
A16	108	105	
A25	120	115	
M25	135	-	
A03	102	87	5
A06	105	90	
A10	120	105	
A16	124	112	
A25	130	115	
M25	140	-	

A Threaded Connections E Depth 15 mm

M18x1,5	ISO 6149	M10
M22x1,5	ISO 6149	M10
G 1/2"		M10
G 3/4"		M10
1/2" NPT		3/8" UNC
3/4" NPT		3/8" UNC
SAE 8 (3/4" - 16 UNF)		3/8" UNC
SAE 12 (1 1/16" - 12 UN)		3/8" UNC

Filter Length	H mm
1	157
2	192
3	234
4	282
5	409

Spare parts FHA051

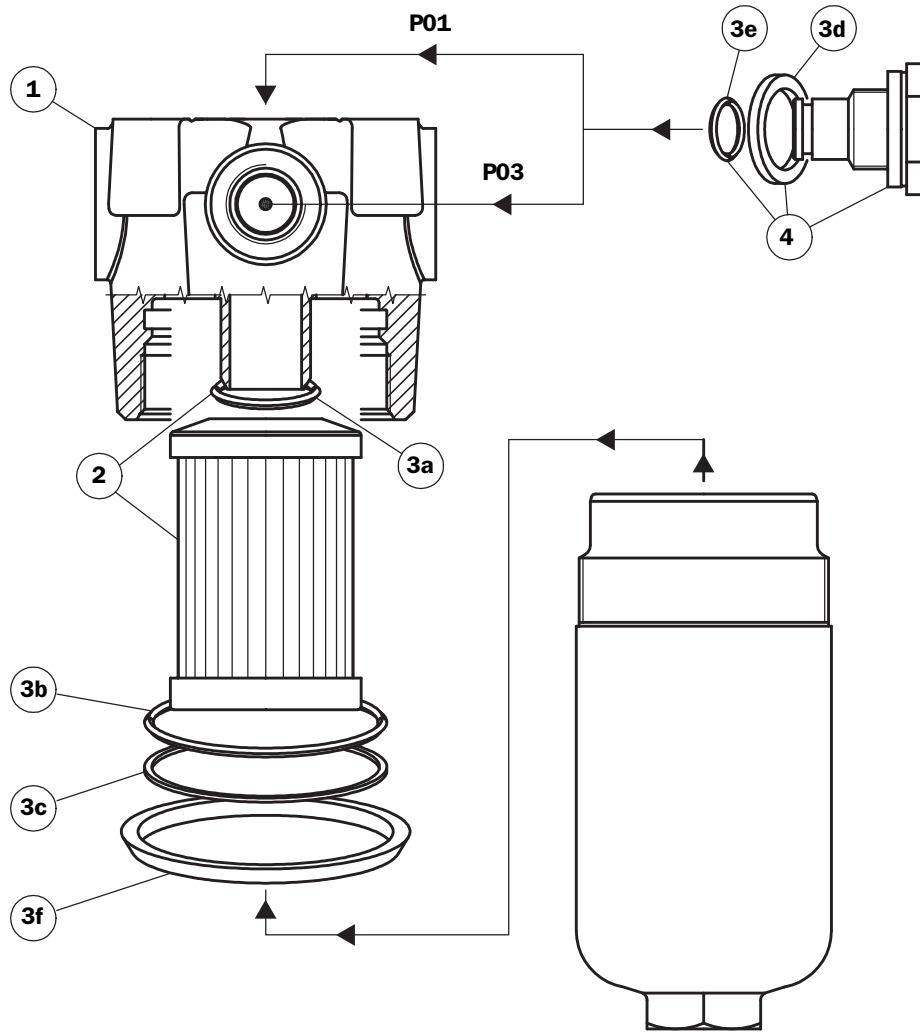

Pos.	Description	Qty.	Series FHA 051 FILTER 051 1 - 2 - 3 - 4 - 5	
1	Complete filter	1	See order table	
2	Filter element	1	See order table	
3	Seal kits	1	NBR 02050288	FPM 02050305
3a	O-Ring for filter element	1	OR 3093 Ø 23.67 x 2.62	
3b	O-Ring for housing	1	O-R 3237 Ø 60 x 2.62	
3c	Anti-extrusion ring	1	Parbak 141 Ø 59.21 x 2.18	
3d	Gasket	1	01030058 (HNBR)	01030046 (FPM)
3e	O-Ring	1	OR 2050 Ø 12.42 x 1.78	
3f	Protection seal	1	01026521	
4	Indicator plug	1	T2H	T2V
-	Indicator	1	See order table	

Ordering information FHA 051

Filter assembly

FHA 051

Example: FHA051

Filter element

HP 050

Example: HP050

1	2	3	4	5	6	7_a
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	B	A	C	A10	N	P01
1	5	3	6	7_b		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
2	A10	A	N	P01		

1 - Filter lengths

1
2
3
4
5

5 - Filter elements

A03	Inorganic microfibre 3 µ	} βx (c) ≥ 1000 see page 10
A06	Inorganic microfibre 6 µ	
A10	Inorganic microfibre 10 µ	
A16	Inorganic microfibre 16 µ	
A25	Inorganic microfibre 25 µ	
M25	Stainless steel mesh 25 µ (style N only)	

2 - Bypass valve

S	Without bypass
B	With bypass
D	With bypass + check valve*
V	With Reverse Flow*
Z	With Reverse Flow + bypass*
T	Without bypass + check valve*

*Reduced cross-section oilways

6 - Filter elements collapse pressure

N	20 bar
R	20 bar (Filter with reverse flow + bypass)
S	210 bar

3 - Seals

A	NBR
V	FPM

7 - Options

a) Filter

P01	Standard threaded connection for indicator
P02	Without threaded connection for indicator
P03	Threaded connection for 90° indicator
Pxx	Customer request

4 - Threaded connections

A	M18x1.5 ISO 6149
B	M22x1.5 ISO 6149
C	G 1/2"
D	G 3/4"
E	1/2" NPT
F	3/4" NPT
G	SAE 8 (3/4" - 16 UNF)
H	SAE 12 (1 1/16" - 12 UN)

b) Filter element

P01	MP Filtri standard
Pxx	Customer request

DIFFERENTIAL INDICATORS (see page 15)

MP Filtri - The filter functions as described in this bulletin are valid exclusively for original MP Filtri filter elements and replacement parts. All rights reserved

The data in this publication is marketing information. MP Filtri reserves the right to make changes to the product described herein at any time it deems fit in relation to technical or commercial requirements. The colors of the products shown on the cover are for illustration purposes only.

Copyright. All rights reserved.